

EVOLINE



reddot winner 2023
lighting design






45X25 Recessed 2 Spots Fixed Line



cutout:45X25mm



Fixed Optic



bezel | baffle




matt white painted




matt black painted

IP Rating:	IP20 and IP44 options
Optics:	14°/25°/35°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 6V 500mA 5W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A




5W Ra92 3000K 14°

h(m)	E(lx)	D(m)
0.5	5014	0.13
1.0	1253	0.26
1.5	557	0.38
2.0	313	0.51
2.5	201	0.64
3.0	139	0.77



5W Ra92 3000K 25°

h(m)	E(lx)	D(m)
0.5	1914	0.24
1.0	479	0.49
1.5	213	0.73
2.0	120	0.98
2.5	77	1.22
3.0	53	1.46




5W Ra92 3000K 35°

h(m)	E(lx)	D(m)
0.5	1006	0.29
1.0	252	0.58
1.5	112	0.88
2.0	63	1.17
2.5	40	1.46
3.0	28	1.75




DuraGreen project:
Stellar Works Home




W system	lm system	optics	code
5W	240	14°	EFL0205W-30N14-B
5W	228	25°	EFL0205W-30N25-B
5W	200	35°	EFL0205W-30N35-B

EVOLINE

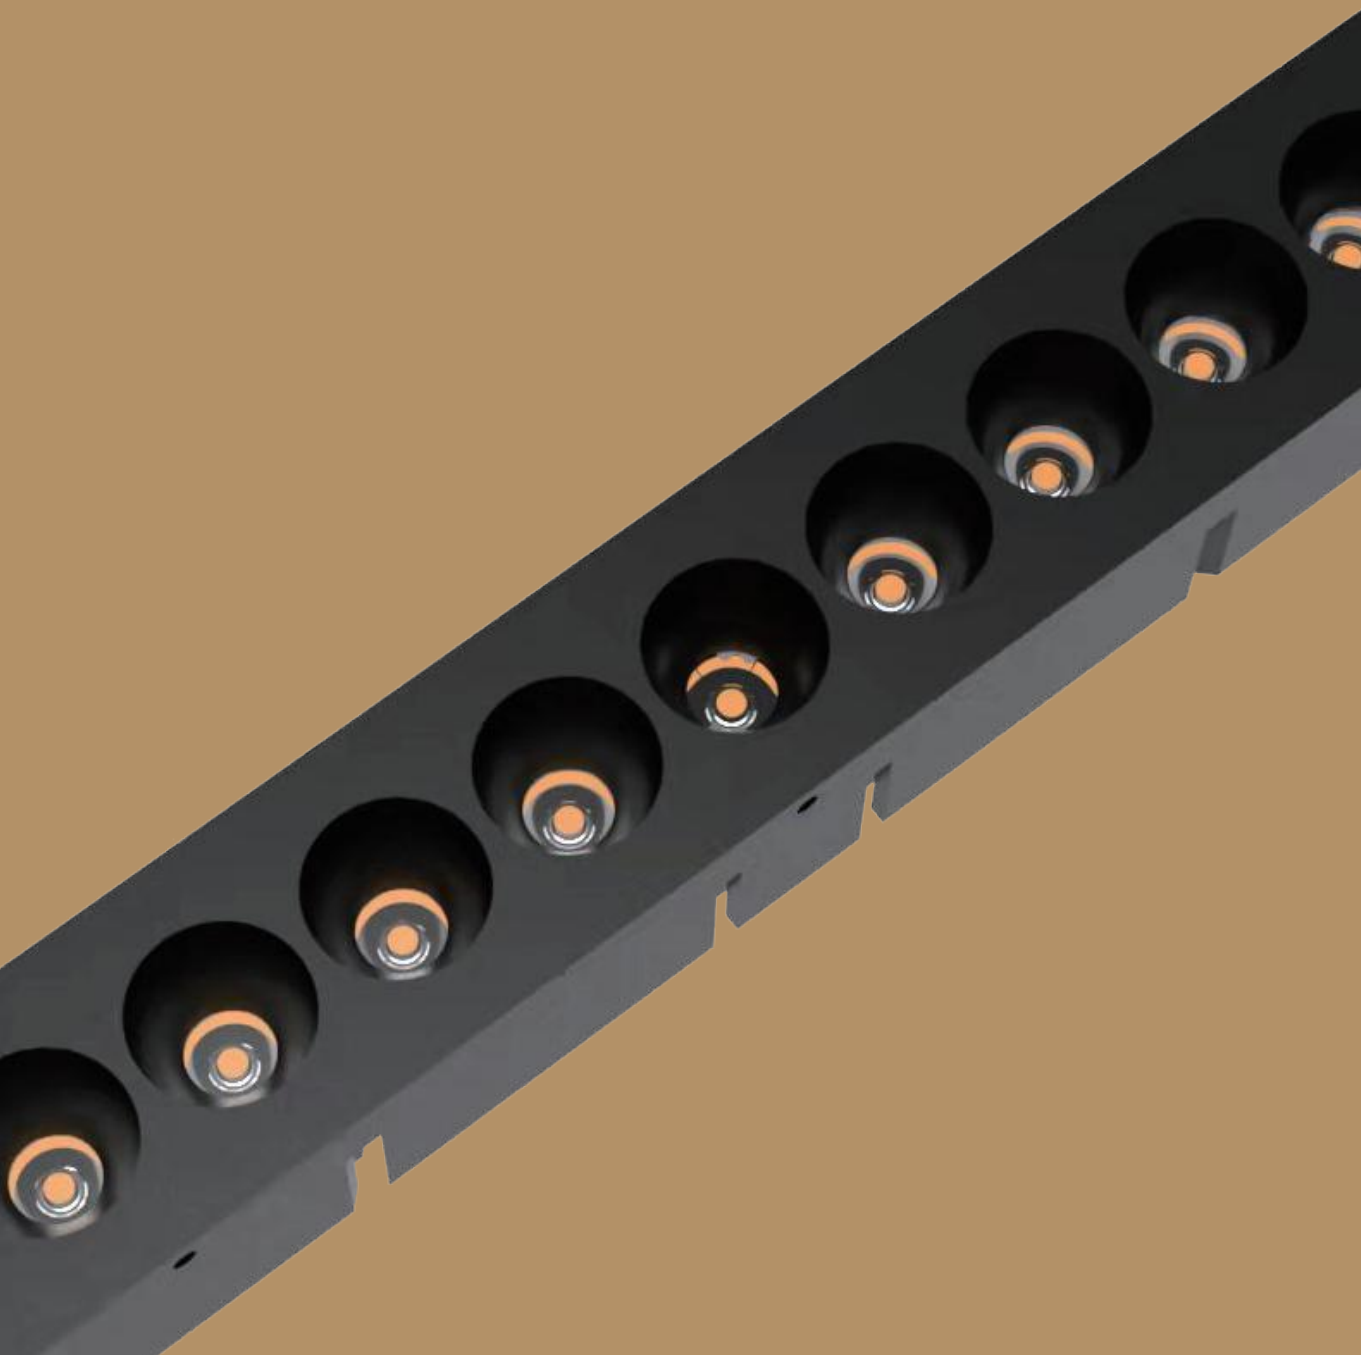

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

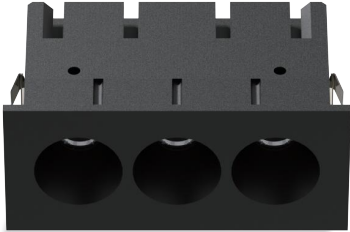

reddot winner 2023
lighting design

