

EVOLINE



reddot winner 2023
lighting design






65X25 Recessed 3 Spots Fixed Line



cutout: 65X25mm



Fixed Optic

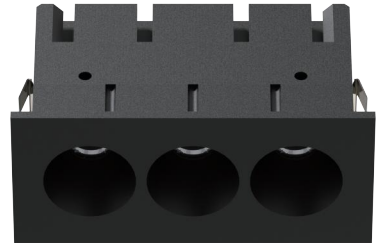

bezel | baffle




matt white painted




matt black painted

IP Rating:	IP20 and IP44 options
Optics:	14°/25°/35°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K/2700K-6000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 9V 500mA 6W DC 9V 700mA 8W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A




8W Ra92 3000K 14°

h(m)	E(lx)	D(m)
0.5	7614	0.14
1.0	1904	0.28
1.5	846	0.42
2.0	476	0.56
2.5	305	0.70
3.0	212	0.84




8W Ra92 3000K 25°

h(m)	E(lx)	D(m)
0.5	2824	0.25
1.0	706	0.50
1.5	314	0.75
2.0	176	1.00
2.5	113	1.26
3.0	78	1.51




8W Ra92 3000K 35°

h(m)	E(lx)	D(m)
0.5	2277	0.31
1.0	569	0.62
1.5	253	0.92
2.0	142	1.23
2.5	91	1.54
3.0	63	1.85




W system	lm system	optics	code
6W	305	14°	EFL0306W-30N14-B
6W	296	25°	EFL0306W-30N25-B
6W	375	35°	EFL0306W-30N35-B




W system	lm system	optics	code
8W	377	14°	EFL0308W-30N14-B
8W	372	25°	EFL0308W-30N25-B
8W	491	35°	EFL0308W-30N35-B

EVOLINE

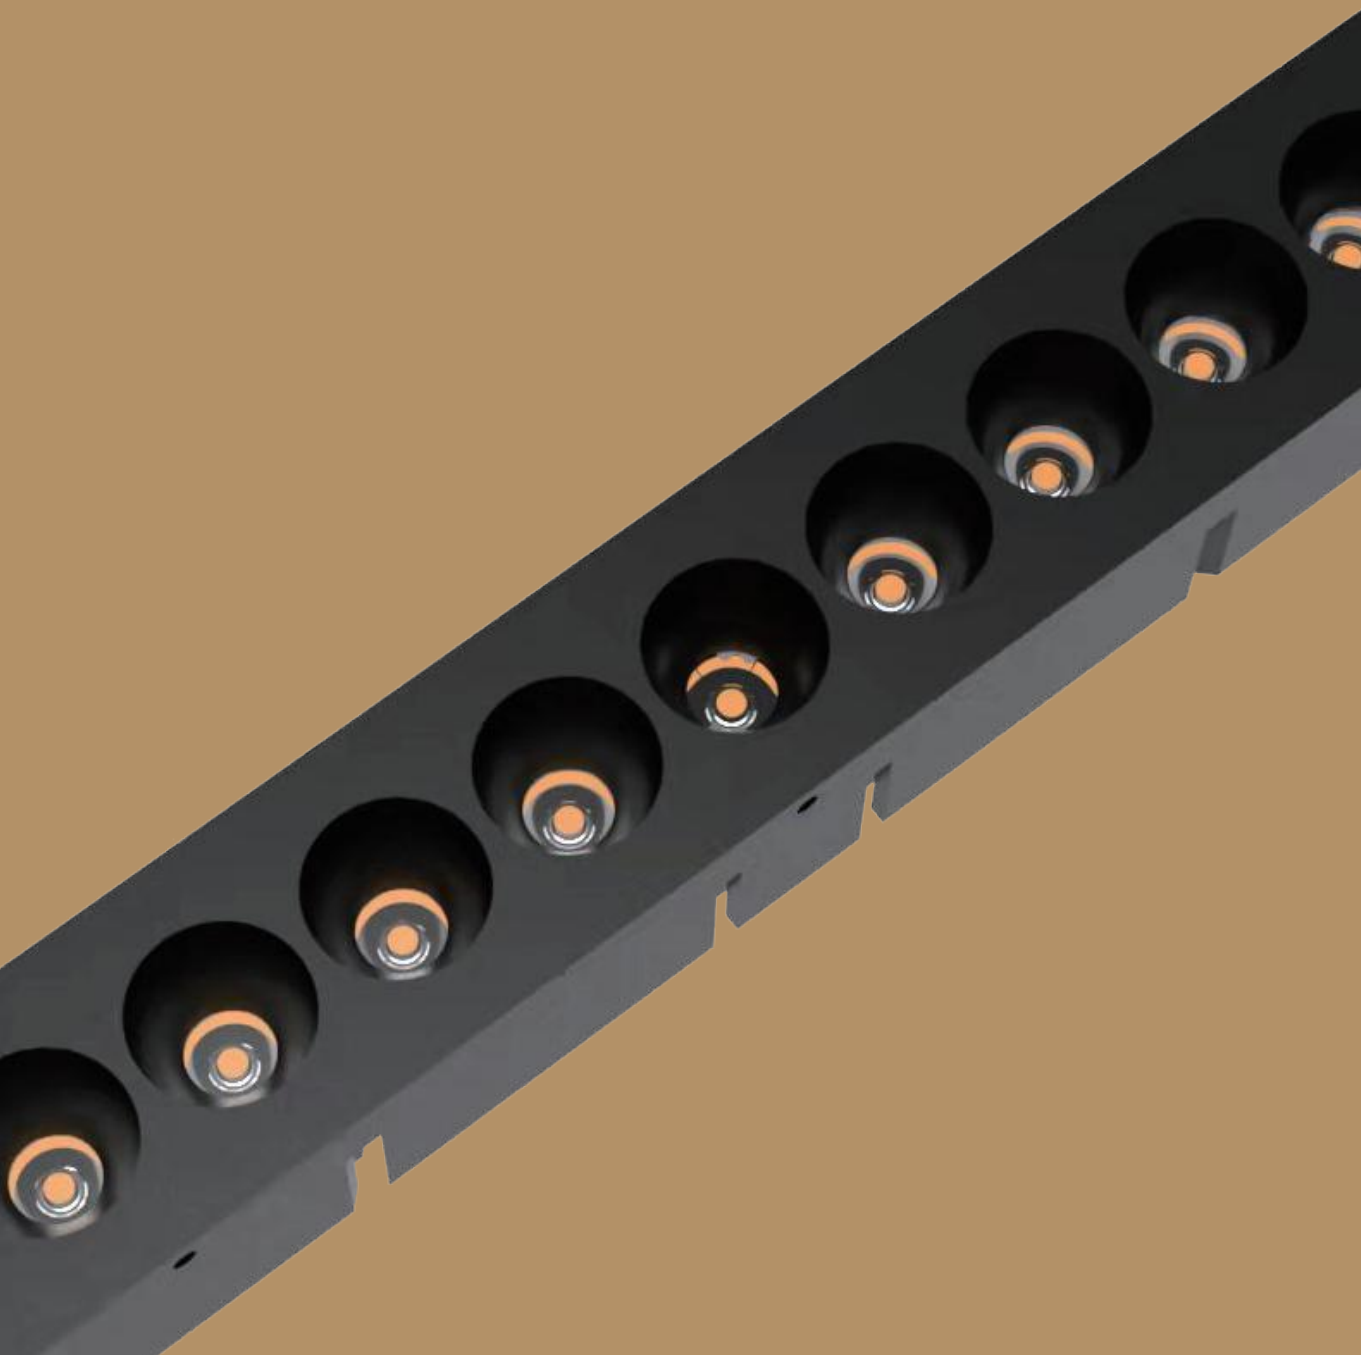

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

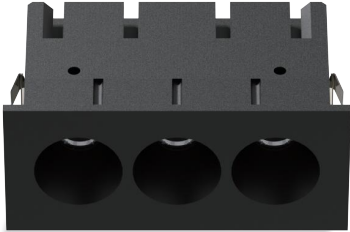

reddot winner 2023
lighting design

