

EVOLINE



reddot winner 2023
lighting design




194X25 Recessed 9 Spots Fixed Line



cutout: 194X25mm



Fixed Optic

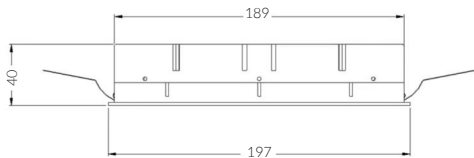

bezel | baffle




matt white painted




matt black painted

IP Rating:	IP20 and IP44 options
Optics:	14°/25°/35°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K/2700K-6000K
Typical Source Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 27V 500mA 15W DC 27V 700mA 20W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A




20W Ra92 3000K 14°

h(m)	E(lx)	D(m)
1.5	3287	0.46
2.0	1849	0.61
4.0	462	1.25
4.5	365	1.40
6.0	205	1.87




20W Ra92 3000K 25°

h(m)	E(lx)	D(m)
1.5	1661	0.63
2.0	935	0.84
4.0	234	1.69
4.5	185	1.90
6.0	104	2.53




20W Ra92 3000K 35°

h(m)	E(lx)	D(m)
1.5	1045	0.93
2.0	588	1.24
4.0	147	2.47
4.5	116	2.78
6.0	65	3.70




W system	lm system	optics	code
15W	1032	14°	EFL0915W-30N14-B
15W	956	25°	EFL0915W-30N25-B
15W	937	35°	EFL0915W-30N35-B




W system	lm system	optics	code
20W	1439	14°	EFL0920W-30N14-B
20W	1264	25°	EFL0920W-30N25-B
20W	1263	35°	EFL0920W-30N35-B

EVOLINE

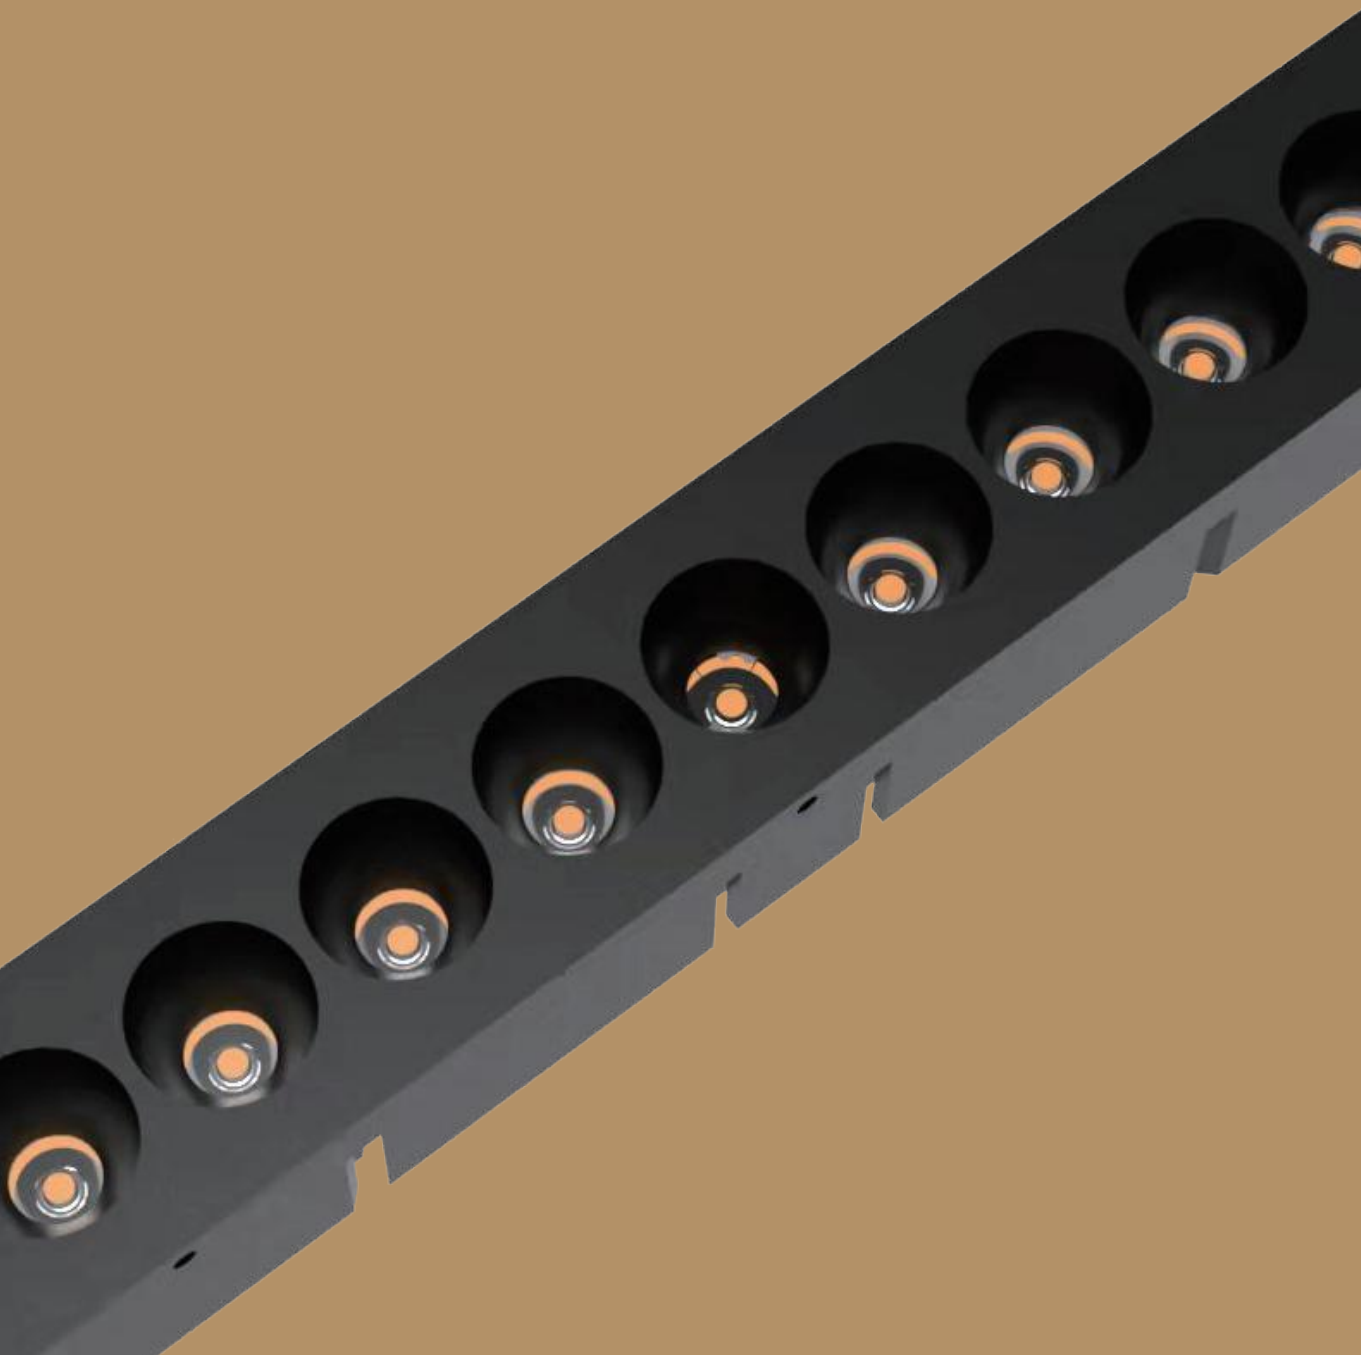

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

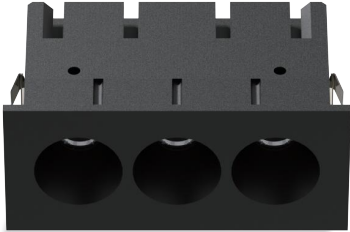

reddot winner 2023
lighting design

