

EVOLINE


68X66 Recessed Square



cutout :68X66



Fixed Optic



Bezel



matt white painted



matt black painted

IP Rating:

IP20 and IP44 options

Optics:

50°

UGR:

<17

CRI:

92Ra

Lifetime:

>50,000 hrs (L70 B10)

CCT:

3000K/3500K

Typical Source

Efficacy (lm/W):

113

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 27V 300mA 8W

Ambient temp:

-20 °C to 45 °C

Class:


II

Ceiling Thickness:

5mm-28mm



Material:

Fine aluminium 6063A




8W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	907	0.48
1.0	227	0.96
1.5	101	1.44
2.0	57	1.93
2.5	36	2.41
3.0	25	2.89

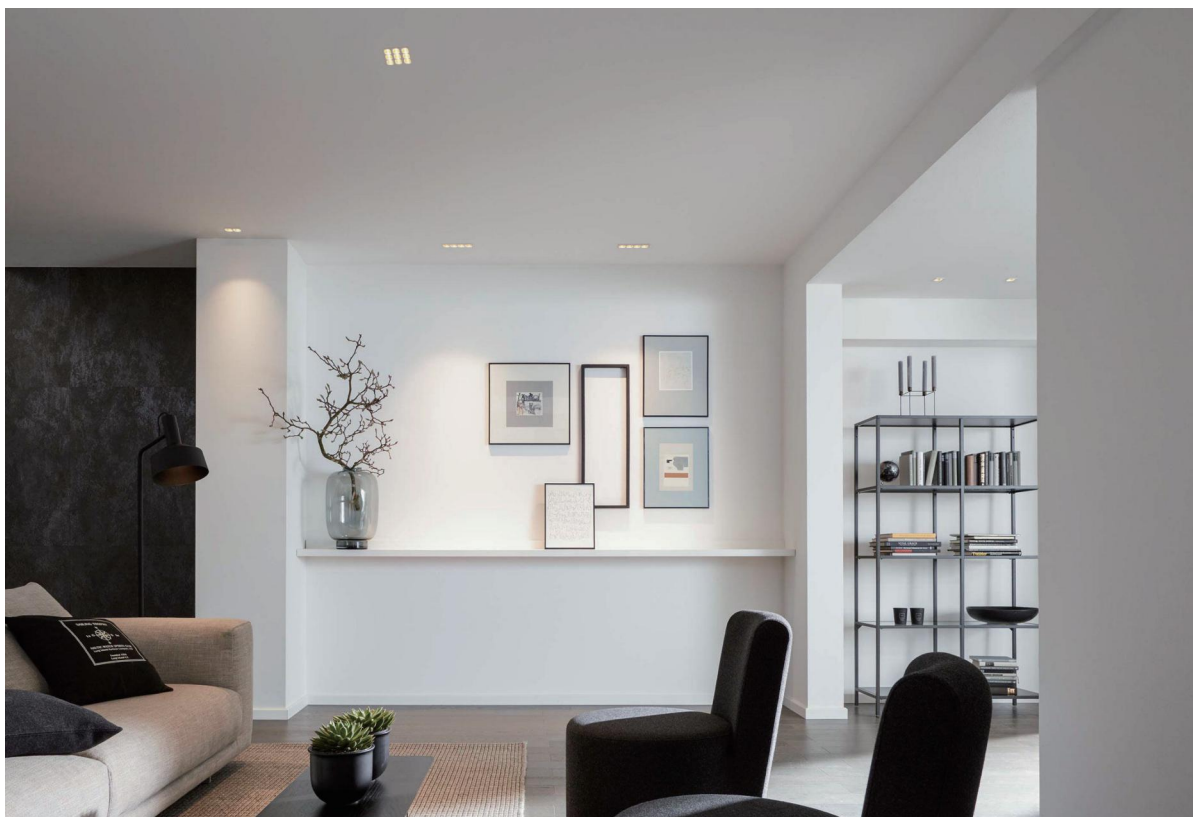


W system	lm system	optics	code
8W	458	50°	EFQ0908W-30N50-W

EVOLINE

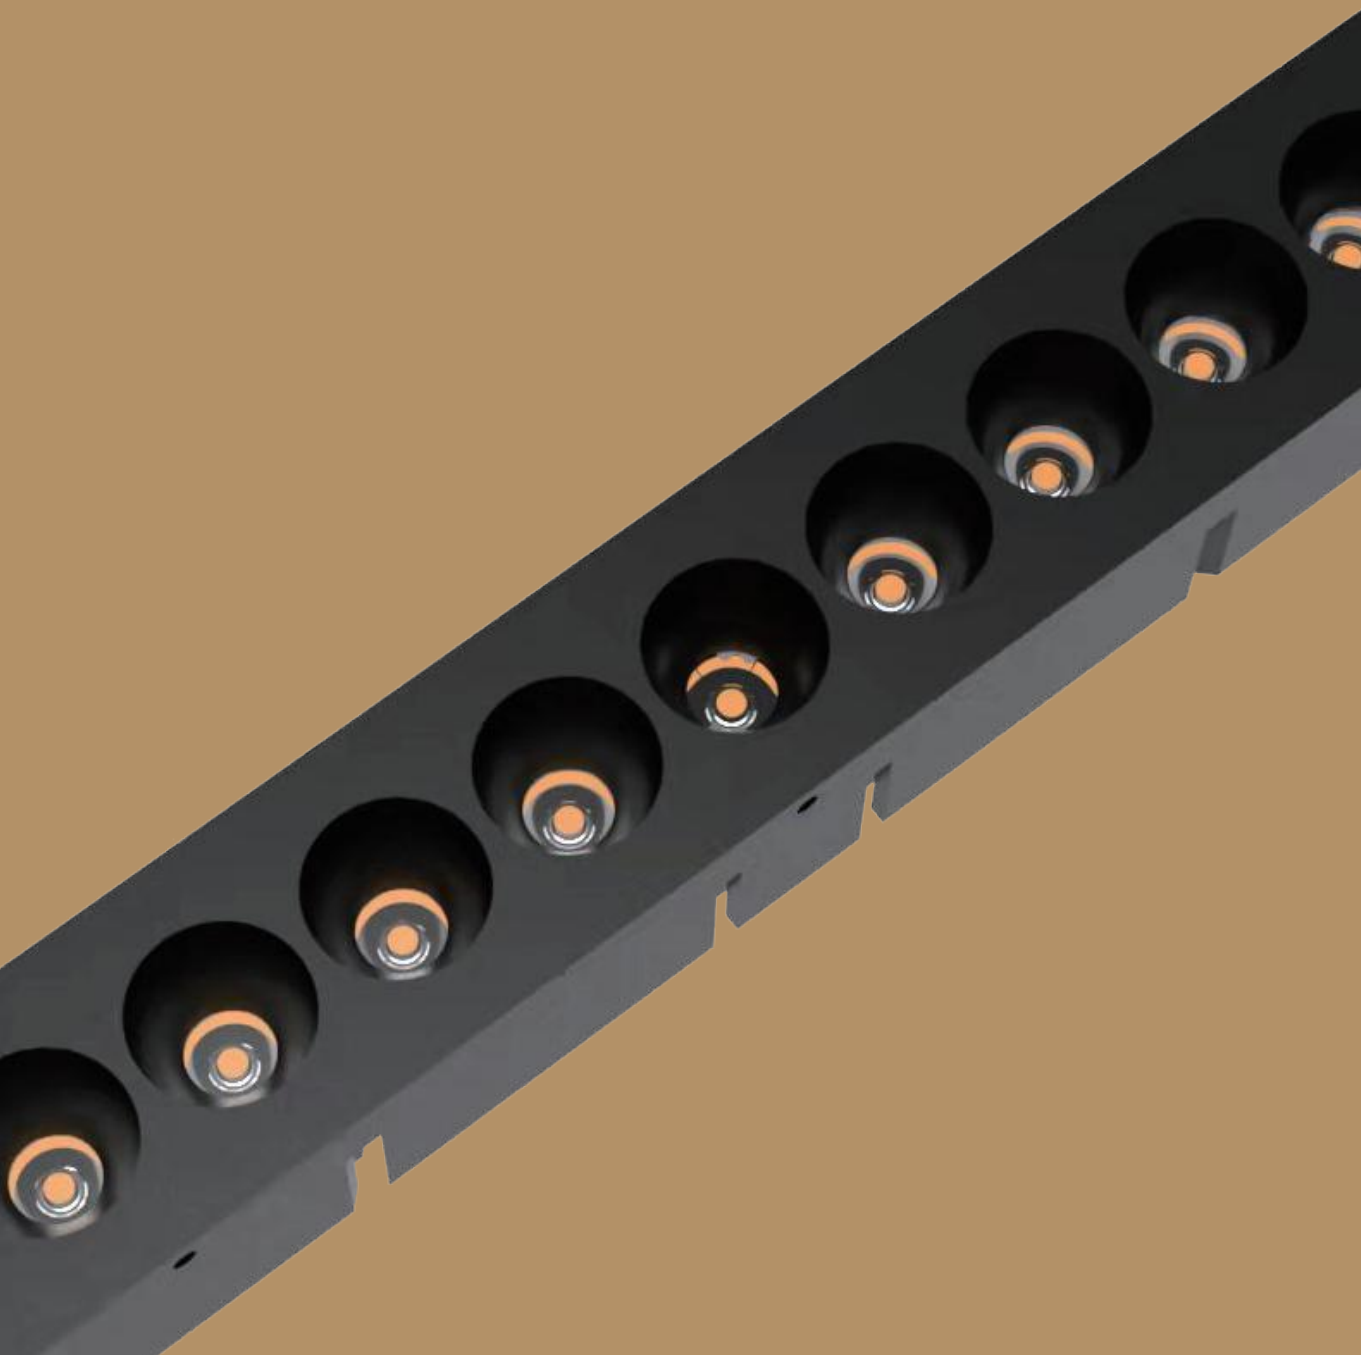

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

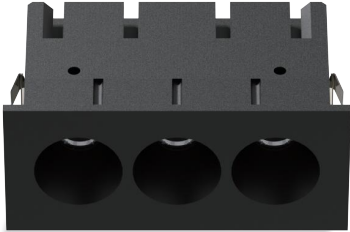

reddot winner 2023
lighting design

