



EVOLINE

67X64 Surface Fixed Square




Fixed Optic



Bezel


- White Painted
- Black Painted

IP Rating:	IP20 and IP44 options
Optics:	50°
UGR:	<17
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 27V 300mA 8W
Ambient temp:	-20 °C to 45 °C
Class:	II
Material:	Fine aluminium 6063A




8W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	907	0.48
1.0	227	0.96
1.5	101	1.44
2.0	57	1.93
2.5	36	2.41
3.0	25	2.89




W system	lm system	optics	code
8W	458	50°	ESQ0908W-30N50-W

EVOLINE

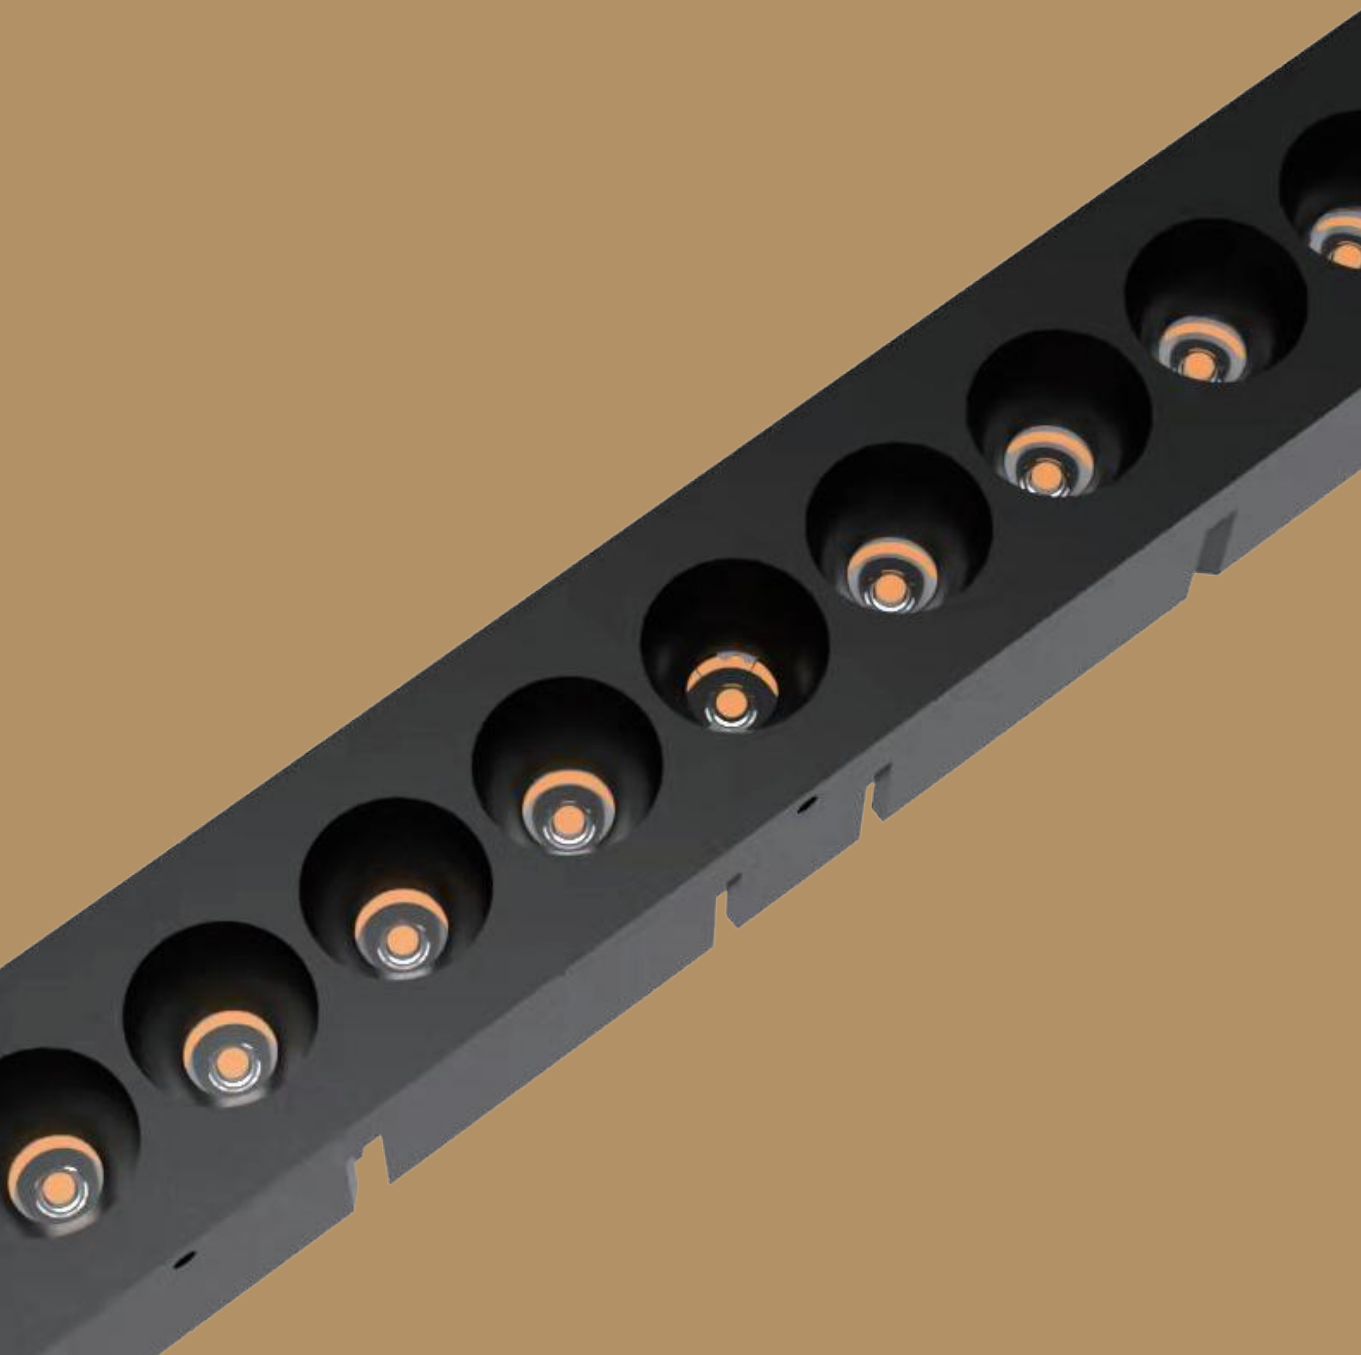

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

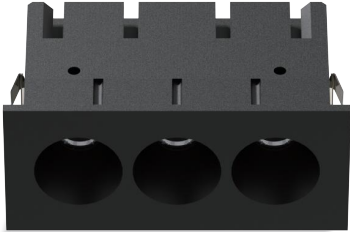

reddot winner 2023
lighting design

