

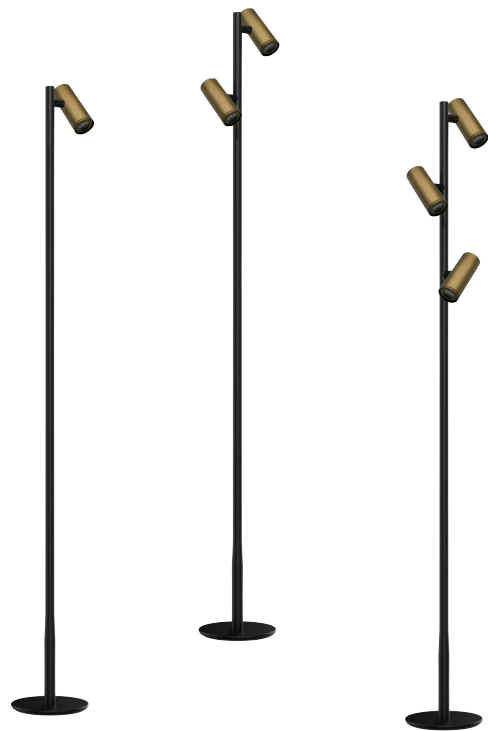


BELLA

Φ41 Zoomable 20°-50° Floor Light

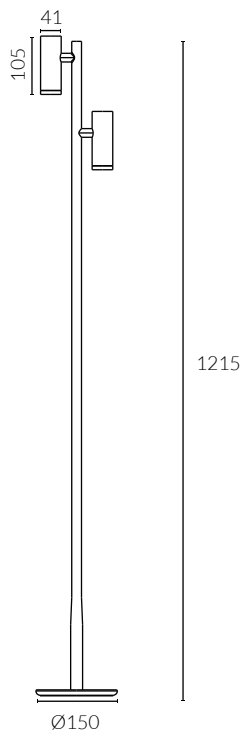


- IP Rating:** IP20
Optics: Zoomable 20°-50°
UGR: <17
CRI: 92Ra
Lifetime: >50,000 hrs (L70 B10)
CCT: 3000K/3500K
Typical Source
Efficacy (lm/W): 96
Control: On/off
Binning
Input: 2 Step MacAdams
Output: 48VDC
Ambient temp: 12V 400mA 6W
Class: -20 °C to 45 °C
Material: II
Fine aluminium 6063A

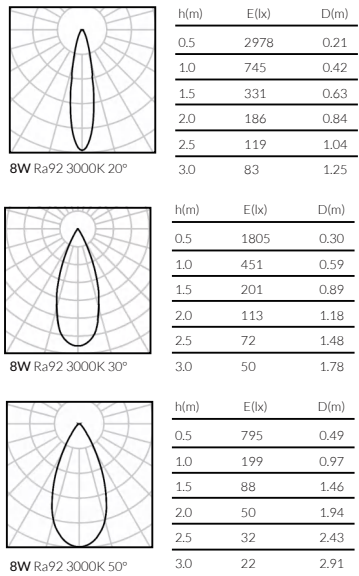





DuraGreen project:
Rimadesio Showroom



W system	Spots	lm system	optics	code
6W	1 Spot	292- 296	20°- 50°	F14106WX1-30N2050-AB



W system	Spots	lm system	optics	code
6W*2	2 Spot	296*2-296*2	20°- 50°	F24106WX2-30N2050-AB



W system	Spots	lm system	optics	code
6W*3	3 Spot	296*3-296*3	20°- 50°	F34106WX3-30N2050-AB