



WASHFLEX


Outdoor Linear Wall Grazer

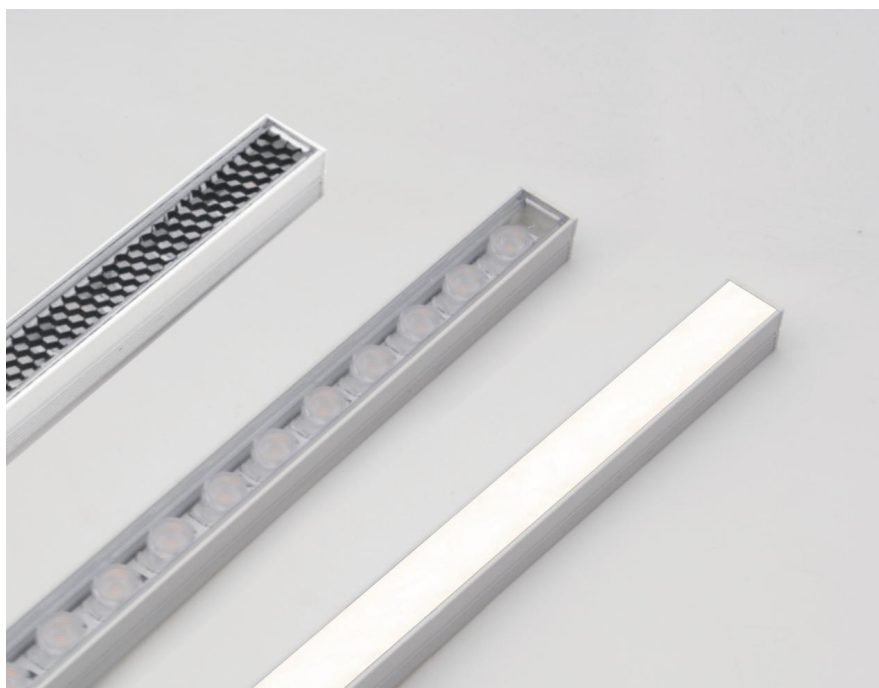


Fixed Optic

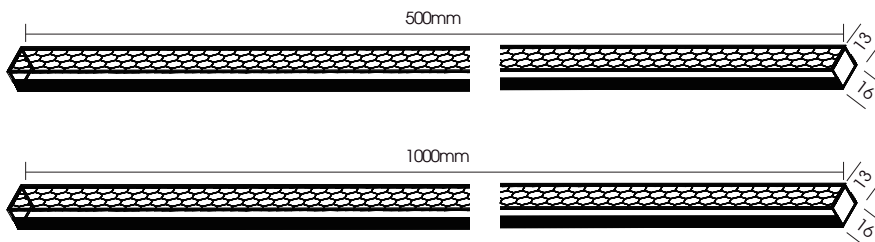

Accessories not included



FC-flat clip



AC-adjustable clip


IP Rating:	IP67
IK:	06
Optics:	15° / 20° / 30° / 20°*45° / 120°
CRI:	>80Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K / RGB
Typical Source Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Voltage:	DC 24V
Power(W):	9W / 18W
Ambient temp:	-20 °C to 45 °C
Class:	III



W system	lm system	length	optics	code
9W	521Lm	500mm	15°	LS1613TJ-9W-15
9W	534Lm	500mm	20°	LS1613TJ-9W-20
9W	562Lm	500mm	30°	LS1613TJ-9W-30
9W	503Lm	500mm	20° *45°	LS1613TJ-9W-2045



W system	lm system	length	optics	code
18W	1045Lm	1000mm	15°	LS1613TJ-18W-15
18W	1070Lm	1000mm	20°	LS1613TJ-18W-20
18W	1132Lm	1000mm	30°	LS1613TJ-18W-30
18W	1022Lm	1000mm	20° *45°	LS1613TJ-18W-2045



W system	lm system	length	optics	code
9W	650Lm	1000mm	120°	LSM1613TJ-9W-120