

FOCUS



Φ70 Outdoor Uplights



cutout : 70mm




Fixed Optic

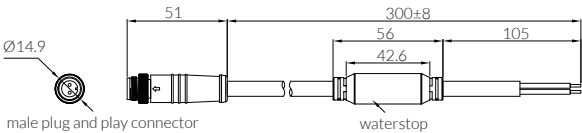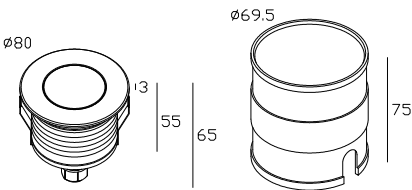


honeycomb as default

- IP Rating:** IP67
- Optics:** 15°/24°/36°
- UGR:** <19
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K
- Typical Source Efficacy (lm/W):** 113
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning** 2 Step MacAdams
- Voltage:** DC 24V
- Power(W):** 8W
- Ambient temp:** -20 °C to 45 °C
- Class:** III
- Plug Type:** Plug & Play (2 pin) - male




8W Ra92 3000K 15°

h(m)	E(lx)	D(m)
0.5	8789	0.17
1.0	2197	0.35
1.5	977	0.52
2.0	549	0.70
2.5	352	0.87
3.0	244	1.05



8W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	5435	0.27
1.0	1359	0.53
1.5	604	0.80
2.0	340	1.06
2.5	217	1.33
3.0	151	1.60




8W Ra92 3000K 36°

h(m)	E(lx)	D(m)
0.5	2746	0.38
1.0	686	0.76
1.5	305	1.14
2.0	172	1.52
2.5	110	1.90
3.0	76	2.28



DuraGreen project:
London Home



W system	lm system	optics	code
8W	549	15°	UL7008W-30N15-W
8W	627	24°	UL7008W-30N24-W
8W	603	36°	UL7008W-30N36-W