


MOOD SQUARE



80*80 Adjustable Square



cutout :80*80mm



Adjustable Optic

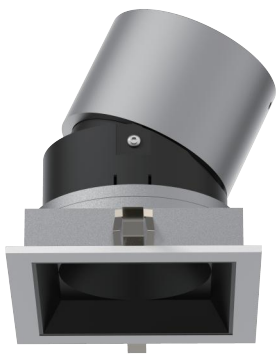

Wall Wash

- IP Rating:**
Optics:
UGR:
CRI:
Lifetime:
CCT:

Typical Source
Efficacy (lm/W):
Control:
Binning:
Input:
Output:

Ambient temp:
Class:
Optional accessories:

IP20 and IP44 options

10°/24°/36°/50°/Wall Wash

< 10

98Ra

> 50,000 hrs (L70 B10)

2700K/3000K/3500K/4000K/5000K/2000K-3000K/
1800K-4000K/2700K-6000K

110

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

2 Step MacAdams

AC220-240V 50/60Hz

DC 36V 200mA 8W

DC 36V 250mA 10W


DC 36V 300mA 12W

DC 36V 350mA 15W

-20 °C to 45 °C


II

Honeycomb louvre, Solite Lense, Spread Lense,
Colour Filter




15W Ra98 3000K 10°

h(m)	E(lx)	D(m)
0.5	20026	0.10
1.0	5007	0.19
1.5	2225	0.29
2.0	1252	0.39
2.5	801	0.48
3.0	556	0.58




15W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	8899	0.19
1.0	2225	0.38
1.5	989	0.57
2.0	556	0.76
2.5	356	1.95
3.0	247	1.14



15W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	5184	0.29
1.0	1296	0.57
1.5	576	0.86
2.0	324	1.15
2.5	207	1.43
3.0	144	1.72



15W Ra98 3000K 50°

h(m)	E(lx)	D(m)
0.5	2095	0.45
1.0	524	0.89
1.5	233	1.34
2.0	131	1.79
2.5	84	2.24
3.0	58	2.68



DuraGreen project:
Private Residence



W system	lm system	optics	code
8W	446	10°	AFQ8008W-30N10-W
8W	495	24°	AFQ8008W-30N24-W
8W	569	36°	AFQ8008W-30N36-W
8W	552	50°	AFQ8008W-30N50-W



W system	lm system	optics	code
10W	522	10°	AFQ8010W-30N10-W
10W	603	24°	AFQ8010W-30N24-W
10W	681	36°	AFQ8010W-30N36-W
10W	657	50°	AFQ8010W-30N50-W



W system	lm system	optics	code
12W	595	10°	AFQ8012W-30N10-W
12W	702	24°	AFQ8012W-30N24-W
12W	795	36°	AFQ8012W-30N36-W
12W	767	50°	AFQ8012W-30N50-W



W system	lm system	optics	code
15W	660	10°	AFQ8015W-30N10-W
15W	794	24°	AFQ8015W-30N24-W
15W	901	36°	AFQ8015W-30N36-W
15W	865	50°	AFQ8015W-30N50-W



W system	lm system	optics	code
12W	590	Wall Wash	AFQW8012W-30NWS-W



MOOD light fittings, stylishly designed with trendy colors and high-quality materials, radiate sophistication and elegance. They offer endless possibilities and exceptional versatility, easily adapting to any space.





Black Matt



White Matt



Silver Matt



Black Specular




Silver Specular



Gold Specular



Grey Specular

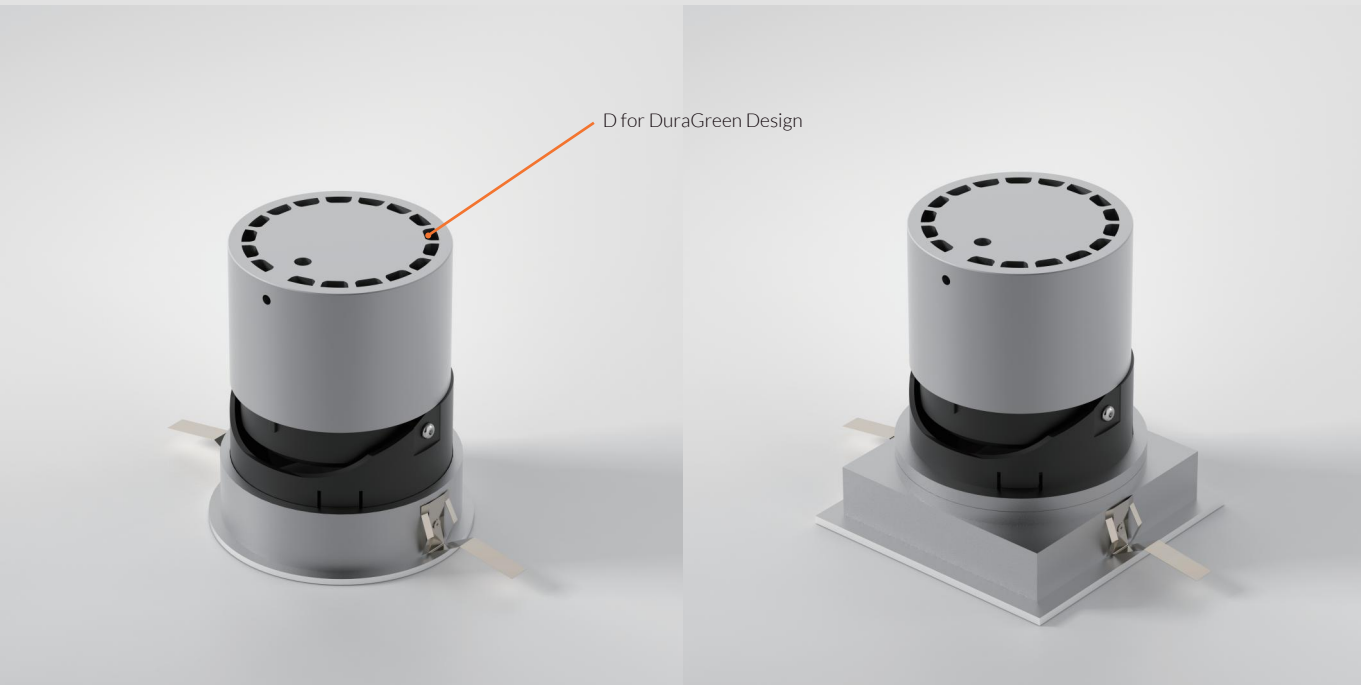

Specification Code

Type	Cut out	Power	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
MF	75	08W	30	N	24	W	B	C
MF/Fixed	22/22mm		27/2700K	M/Mains Dim	05/5°	W/White	B/Black Specular	C/Clear Lens
AF/Adjustable	33/33mm		30/3000K	D/DALI	10/10°	B/Black	S/Silver Specular	F/Frosted Lens
MFL/Lens type,	35/35mm		40/4000K	0/0-10V	13/13°	L/Polished Chrome	W/White Matt	H/Honeycomb
Fixed	40/40mm		WD/Warm Dim	N/Non Dim	15/15°	G/Polished Brass	BM/Black Matt	S/Spread Lense
AFL/Lens type,	45/45mm		1840/1800K-4000K	X/No Driver	20/20°	J/Antique Bronze		
Adjustable	55/55mm		2765/2700K-6500K		24/24°	S/Satin Nickle		
MFW/Wall Wash	58/58mm				30/30°			
MFZ/Zoomable	75/75mm				36/36°			
MFZ/Pinhole	80/80mm				50/50°			
MFQ/Fixed Square	100/100mm							