


FLOW

Surface 5 Spots Linear



Fixed

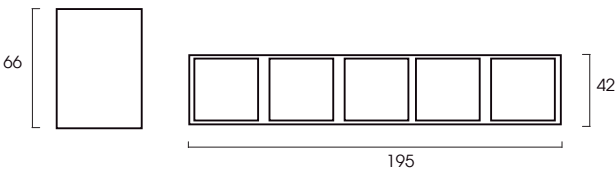

White Painted



Black Painted



IP Rating:

IP20 and IP44 options

Optics:

12°/24°/38°/50°/Wall Wash

UGR:

< 10

CRI:

92Ra

Lifetime:

> 50,000 hrs (L70 B10)

CCT:

3000K

Typical Source

Efficacy (lm/W):

113

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 300mA 12W


DC 36V 350mA 15W

Ambient temp:

-20 °C to 45 °C


Class:

II




15W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	9378	0.21
1.0	2344	0.43
1.5	1042	0.64
2.0	586	0.86
2.5	375	1.07
3.0	260	1.29



15W Ra92 3000K 38°

h(m)	E(lx)	D(m)
0.5	5017	0.33
1.0	1254	0.67
1.5	557	1.00
2.0	314	1.34
2.5	201	1.67
3.0	139	2.01



15W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	3325	0.50
1.0	831	1.00
1.5	369	1.50
2.0	208	1.99
2.5	133	2.49
3.0	92	2.99



W system	lm system	optics	code
12W	1075	12°	SFL0512W-30N12-B
12W	1059	24°	SFL0512W-30N24-B
12W	968	38°	SFL0512W-30N38-B
12W	1066	50°	SFL0512W-30N50-B



W system	lm system	optics	code
15W	1187	12°	SFL0515W-30N12-B
15W	1241	24°	SFL0515W-30N24-B
15W	1266	38°	SFL0515W-30N38-B
15W	1220	50°	SFL0515W-30N50-B