


ULTRAFIN



This range of light fittings is extremely small yet powerful, designed for use in showcases. It represents the pinnacle of LED technology and component miniaturization.

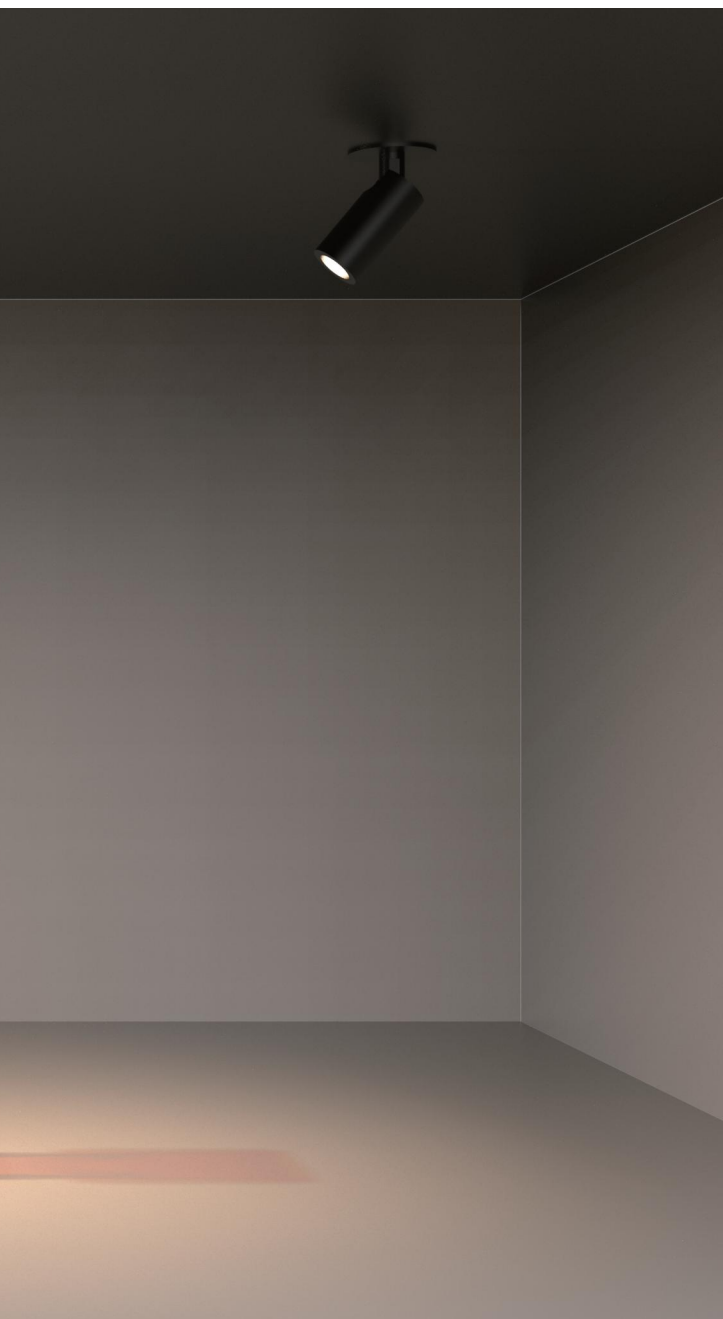


ULTRAFIN

Φ12.4 Showcase





[view on website](#)

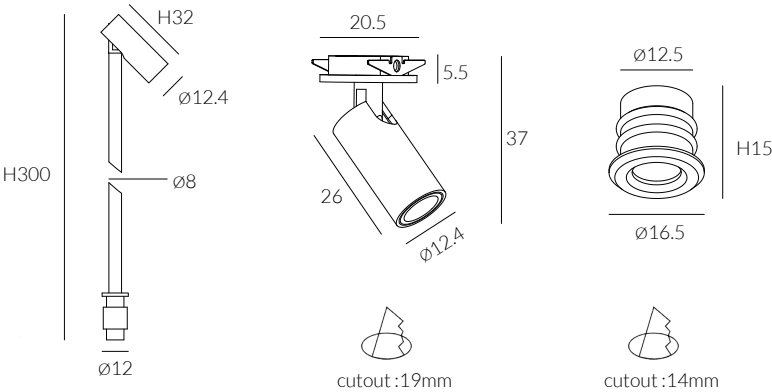


-  Matt White
-  Matt Black
-  Solid Brass

IP Rating:	IP20 and IP44 options
Optics:	15°/25°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 3V 300mA 1.3W
Ambient temp:	-20 °C to 45 °C
Class:	II
Material:	Fine aluminium 6063A

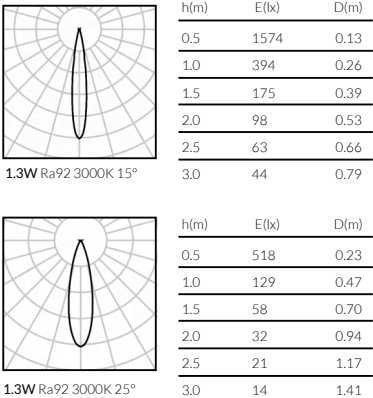



W system	lm system	optics	code
1.3W	79	15°	MFL141.3W-30N15
1.3W	71	25°	MFL141.3W-30N25



W system	lm system	optics	code
1.3W	79	15°	MAR121.3W-30N15
1.3W	71	25°	MAR121.3W-30N25



W system	lm system	optics	code
1.3W	79	15°	F121.3W-30N15
1.3W	71	25°	F121.3W-30N25