

SYSTEM 57



Φ57 ACME In/out Spotlight Trimless Adjustable Spotlight



cutout :57mm



Adjustable Optic

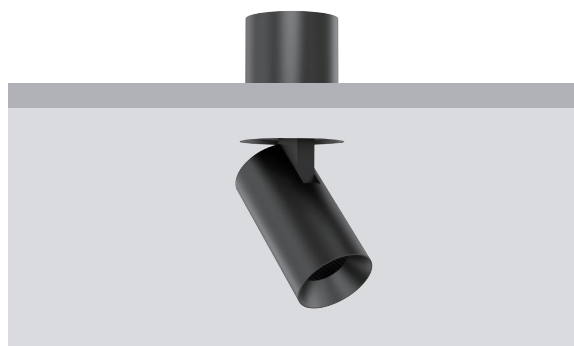

matt white painted



matt black painted



Bespoke

IP Rating:

IP20 and IP44 options

Optics:

15°/24°/36°

UGR:

<10

CRI:

98Ra

Lifetime:

>50,000 hrs (L70 B10)

CCT:

2700K/3000K/2700K-6000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 200mA 8W

Ambient temp:

-20 °C to 45 °C

Class:

II

Optional accessories:


Honeycomb louvre, Solite Lense, Spread Lense,
Colour Filter

Material:

Fine aluminium 6063A


Certification:

CB/CE/UKCA/GLOBAL MARK




8W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	7550	0.11
1.0	1888	0.22
1.5	839	0.34
2.0	472	0.45
2.5	302	0.56
3.0	210	0.67



8W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	2868	0.24
1.0	717	0.49
1.5	319	0.73
2.0	179	0.98
2.5	115	1.22
3.0	80	1.46




8W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	2108	0.36
1.0	527	0.72
1.5	234	1.08
2.0	132	1.44
2.5	84	1.80
3.0	59	2.16



DuraGreen project:
CO | Michelin Stared Restaurant



W system	lm system	optics	code
8W	328	15°	AFL5708W-IO-TL-30N15
8W	404	24°	AFL5708W-IO-TL-30N24
8W	499	36°	AFL5708W-IO-TL-30N36