

SYSTEM 78



Φ78 BELLA Zoom Long Snoot Downlight Mini-Trim Adjustable Downlight



cutout :78mm



Adjustable Optic

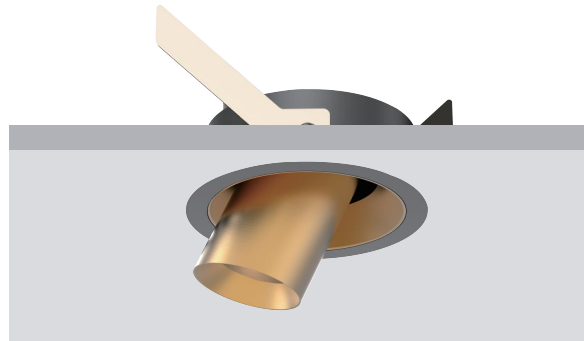

matt white painted




matt black painted




Bespoke

IP Rating:	IP20 and IP44 options
Optics:	Zoomable 15°-50°
UGR:	<10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 45 °C
Class:	II
Optional accessories:	Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter
Ceiling Thickness:	9mm-28mm
Material:	Fine aluminium 6063A
Certification:	CB/CE/UKCA/GLOBAL MARK




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	12099	0.14
1.0	3025	0.27
1.5	1344	0.41
2.0	756	0.54
2.5	484	0.68
3.0	336	0.81



10W Ra98 3000K 40°

h(m)	E(lx)	D(m)
0.5	2174	0.38
1.0	544	0.76
1.5	242	1.14
2.0	136	1.52
2.5	87	1.90
3.0	60	2.28

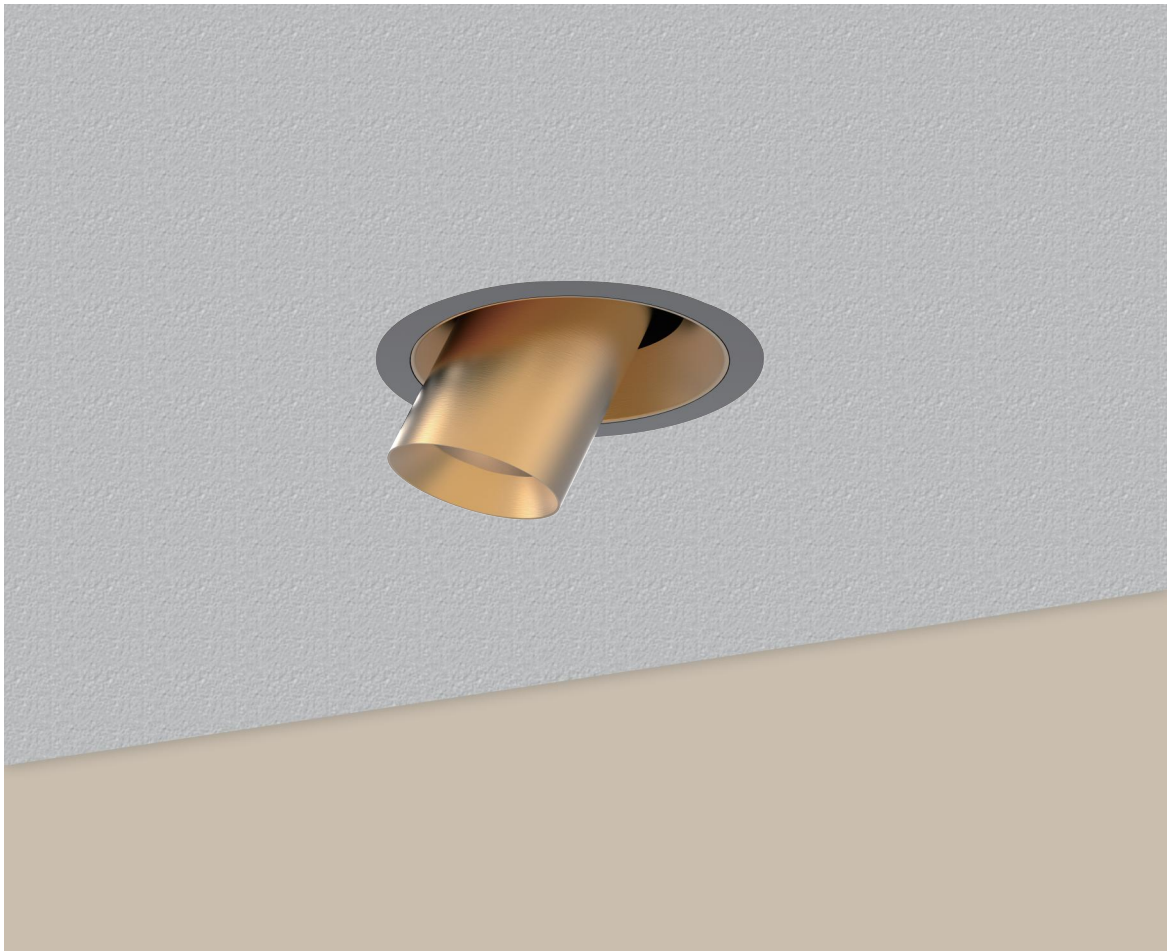

W system	lm system	optics	code
10W	756-747	15°- 50°	AFL7810W-LS-30N1550