

SYSTEM 78



Φ78 BELLA Zoom Short Snoot Downlight Mini-Trim Adjustable Downlight



cutout :78mm



Adjustable Optic

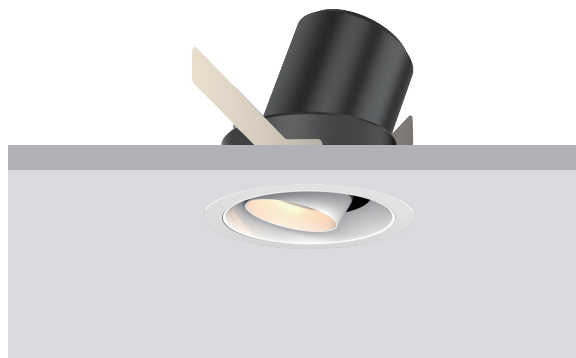

baffle



Black Painted
9005



White Painted
9016

Signature Metal Finishes



Polished
Brass



Antique
Brass



Copper
Bronze



Aged
Brass



Bright
Chrome

IP Rating:

IP20 and IP44 options

Optics:

Zoomable 20°-50°

UGR:

< 10

CRI:

98Ra

Lifetime:

>50,000 hrs (L70 B10)

CCT:

2700K/3000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 250mA 10W

Ambient temp:

-20 °C to 45 °C

Class:

II

Optional accessories:

Honeycomb louvre, Solite Lense, Spread Lense,
Colour Filter

Ceiling Thickness:


9mm-28mm

Material:

Fine aluminium 6063A


Certification:

CB/CE/UKCA/GLOBAL MARK




10W Ra98 3000K 20°

h(m)	E(lx)	D(m)
0.5	4916	0.20
1.0	1229	0.40
1.5	546	0.59
2.0	307	0.79
2.5	197	0.99
3.0	137	1.19



10W Ra98 3000K 50°

h(m)	E(lx)	D(m)
0.5	1480	0.44
1.0	370	0.88
1.5	164	1.32
2.0	92	1.76
2.5	59	2.21
3.0	41	2.65

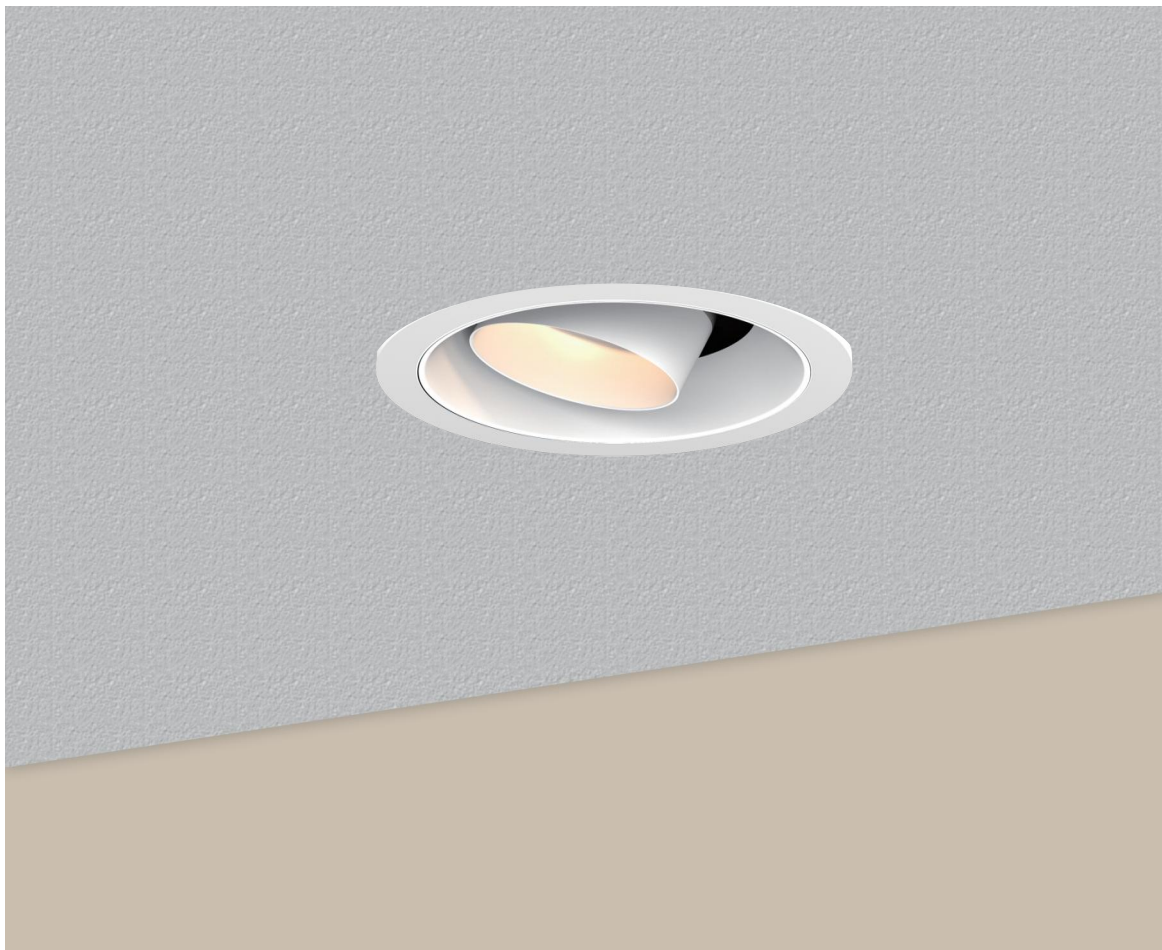

W system	lm system	optics	code
10W	703-690	20°- 50°	AFL7810W-SS-30N2050