

SYSTEM 78



Φ78 BELLA Zoom Short Snoot Downlight Mini-Trim Adjustable Downlight



cutout :78mm



Adjustable Optic

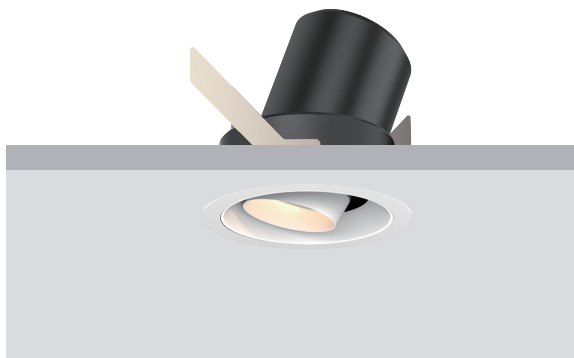

matt white painted



matt black painted



Bespoke

IP Rating:

IP20 and IP44 options

Optics:

Zoomable 15°-50°

UGR:

< 10

CRI:

98Ra

Lifetime:

>50,000 hrs (L70 B10)

CCT:

2700K/3000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 250mA 10W

Ambient temp:

-20 °C to 45 °C

Class:

II

Optional accessories:

Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter

Ceiling Thickness:


9mm-28mm

Material:

Fine aluminium 6063A


Certification:

CB/CE/UKCA/GLOBAL MARK





10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	12099	0.14
1.0	3025	0.27
1.5	1344	0.41
2.0	756	0.54
2.5	484	0.68
3.0	336	0.81



10W Ra98 3000K 40°

h(m)	E(lx)	D(m)
0.5	2174	0.38
1.0	544	0.76
1.5	242	1.14
2.0	136	1.52
2.5	87	1.90
3.0	60	2.28

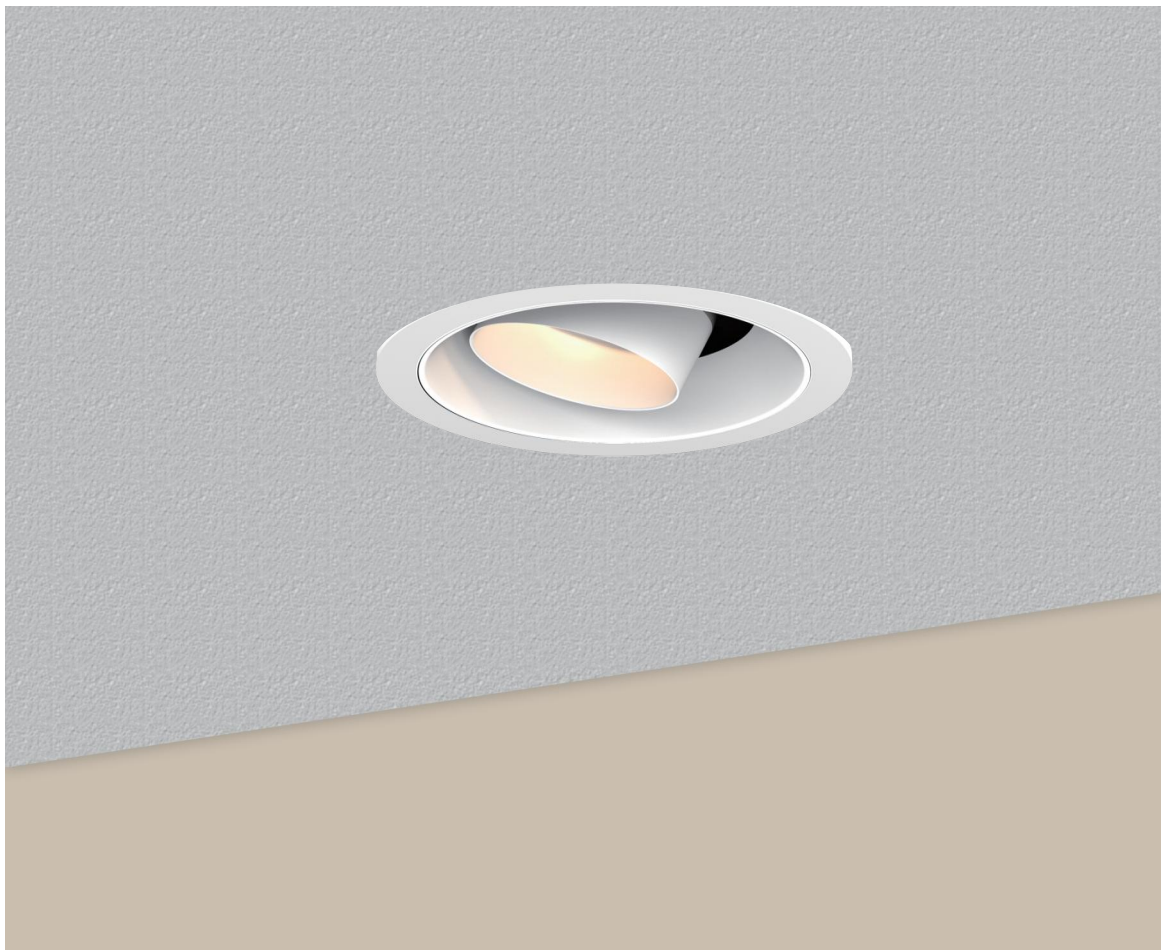

W system	lm system	optics	code
10W	756-747	15°- 50°	AFL7810W-SS-30N1550