







65X25 Recessed 3 Spots Fixed Line



cutout :65X25mm



Fixed Optic

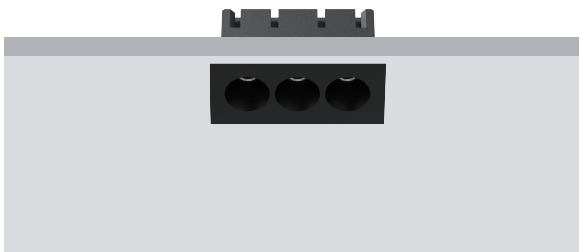

bezel | baffle



White Painted
9016




Black Painted
9005



Bespoke

IP Rating:	IP20 and IP44 options
Optics:	35°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 9V 500mA 6W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A
Certification :	CE/60-MINUNTE FIRE RESISTANCE




6W Ra92 3000K 35°

h(m)	E(lx)	D(m)
0.5	1715	0.32
1.0	429	0.64
1.5	191	0.96
2.0	107	1.28
2.5	69	1.60
3.0	48	1.91



DuraGreen project:
Home Cinema in London



W system	lm system	optics	code
6W	375	35°	EFL0306W-30N35