





130X25 Recessed 6 Spots Fixed Line



cutout:130X25mm



Fixed Optic

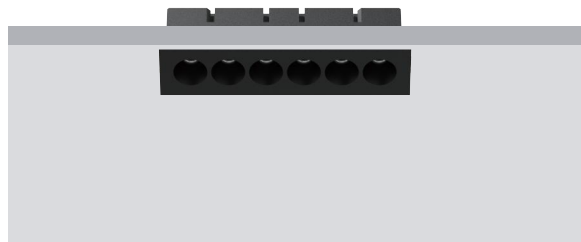

bezel | baffle



White Painted
9016




Black Painted
9005




Bespoke

IP Rating:	IP20 and IP44 options
Optics:	35°
UGR:	< 10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 18V 600mA 12W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A
Certification:	CE/60-MINUNTE FIRE RESISTANCE



12W Ra92 3000K 35°

h(m)	E(lx)	D(m)
0.5	4125	0.34
1.0	1031	0.68
1.5	458	1.02
2.0	258	1.35
2.5	165	1.69
3.0	115	2.03

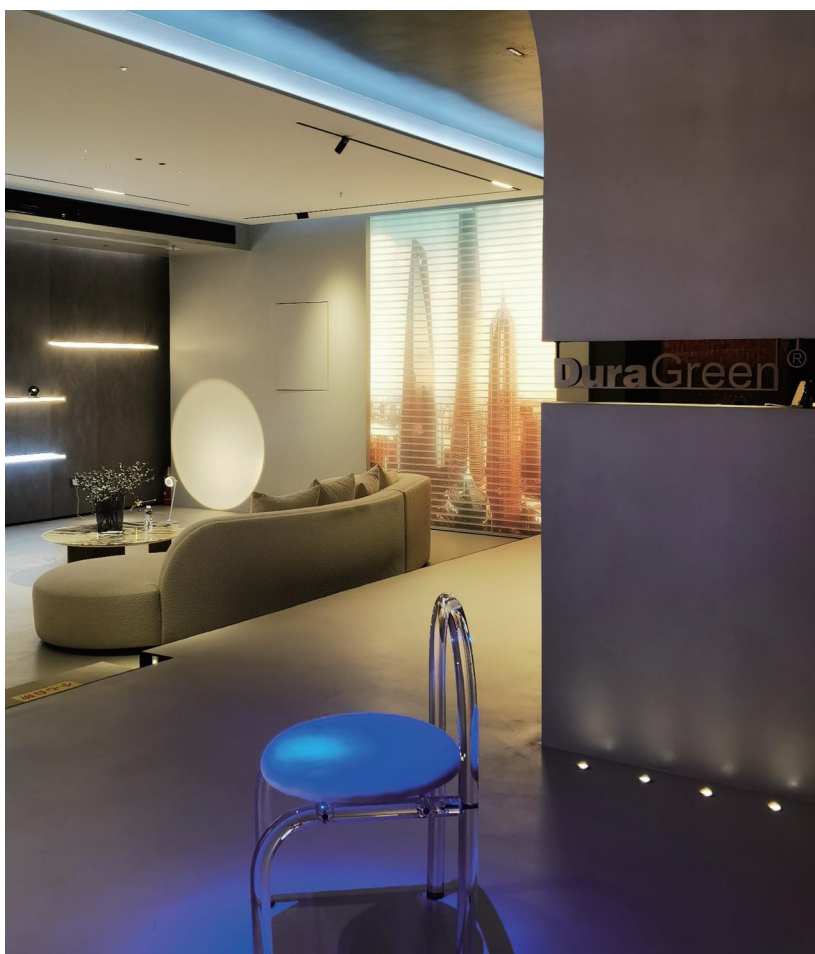

DuraGreen project:
DuraGreen Showroom



W system	lm system	optics	code
12W	790	35°	EFL0612W-30N35