

SYSTEM 36



Φ36 ACME Downlight Mini-Trim Fixed Straight Baffle



cutout:36mm



Fixed Optic

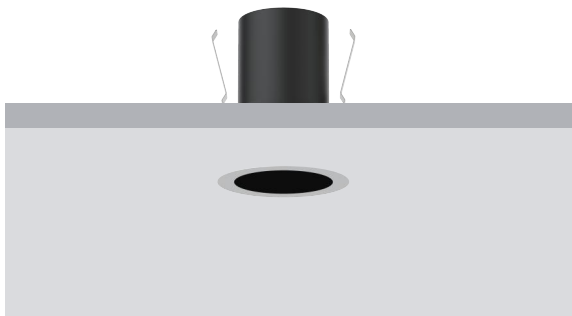


baffle



Black Painted
9005

IP Rating:	IP20
Optics:	24°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K
Typical Source	
Efficacy (lm/W):	103
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 12V 300mA 5W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A




5W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	1582	0.19
1.0	396	0.38
1.5	176	0.57
2.0	99	0.76
2.5	63	0.95
3.0	44	1.14



DuraGreen project:
KY Office, Beijing



W system	lm system	optics	code
5W	127	24°	MFL3605W-30N24