

SYSTEM 36



Φ36 ACME Path Light Mini-Trim Fixed Wall /Path Light



cutout:36mm



Wall Wash Optic

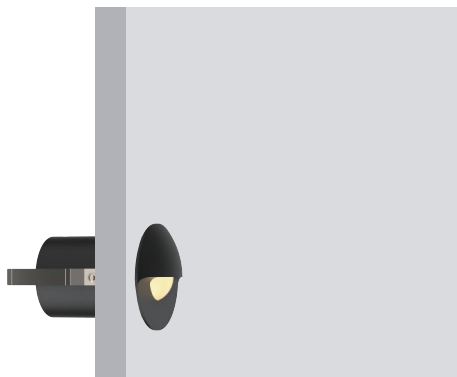

Black Painted
9005




Bespoke



Accessories not included

Concrete recessing kit

IP Rating:	IP20
Optics:	Asymmetrical Wallwash
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K
Typical Source	
Efficacy (lm/W):	103
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 3V 300mA 1.3W
Ambient temp:	-20 °C to 45 °C
Class:	II
Ceiling Thickness:	5mm-28mm
Material:	Fine aluminium 6063A



1.3W Ra92 3000K
Asymmetrical

h(m)	E(lx)	D(m)
0.5	130	0.47
1.0	33	0.94
1.5	14	1.41
2.0	8	1.88
2.5	5	2.35
3.0	4	2.82



W system	Im system	optics	code
1.3W	31	Asymmetrical Wallwash	MFL361.3W-30NWS