


BELLA

Φ50 Outdoor Projector Zoomable 15°-50°




Adjustable Optic




Structure Finish




Solid Brass

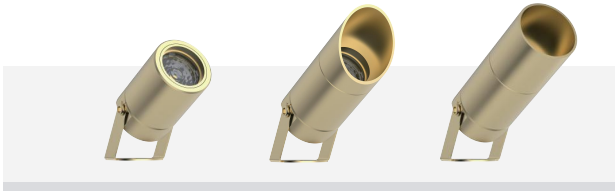


Accessories not included



Snoot Tube




Snoot 55°




Ground Stake

IP Rating:	IP65
Optics:	Zoomable 15°-50°
UGR:	<19
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Voltage:	DC 24V
Power(W):	6W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Material:	Brass + Stainless Steel




6W Ra92 2700K 30°

h(m)	E(lx)	D(m)
0.5	2978	0.21
1.0	745	0.42
1.5	331	0.63
2.0	186	0.84
2.5	119	1.04
3.0	83	1.25




6W Ra92 2700K 30°

h(m)	E(lx)	D(m)
0.5	1805	0.30
1.0	451	0.59
1.5	201	0.89
2.0	113	1.18
2.5	72	1.48
3.0	50	1.78




6W Ra92 2700K 50°

h(m)	E(lx)	D(m)
0.5	795	0.49
1.0	199	0.97
1.5	88	1.46
2.0	50	1.94
2.5	32	2.43
3.0	22	2.91

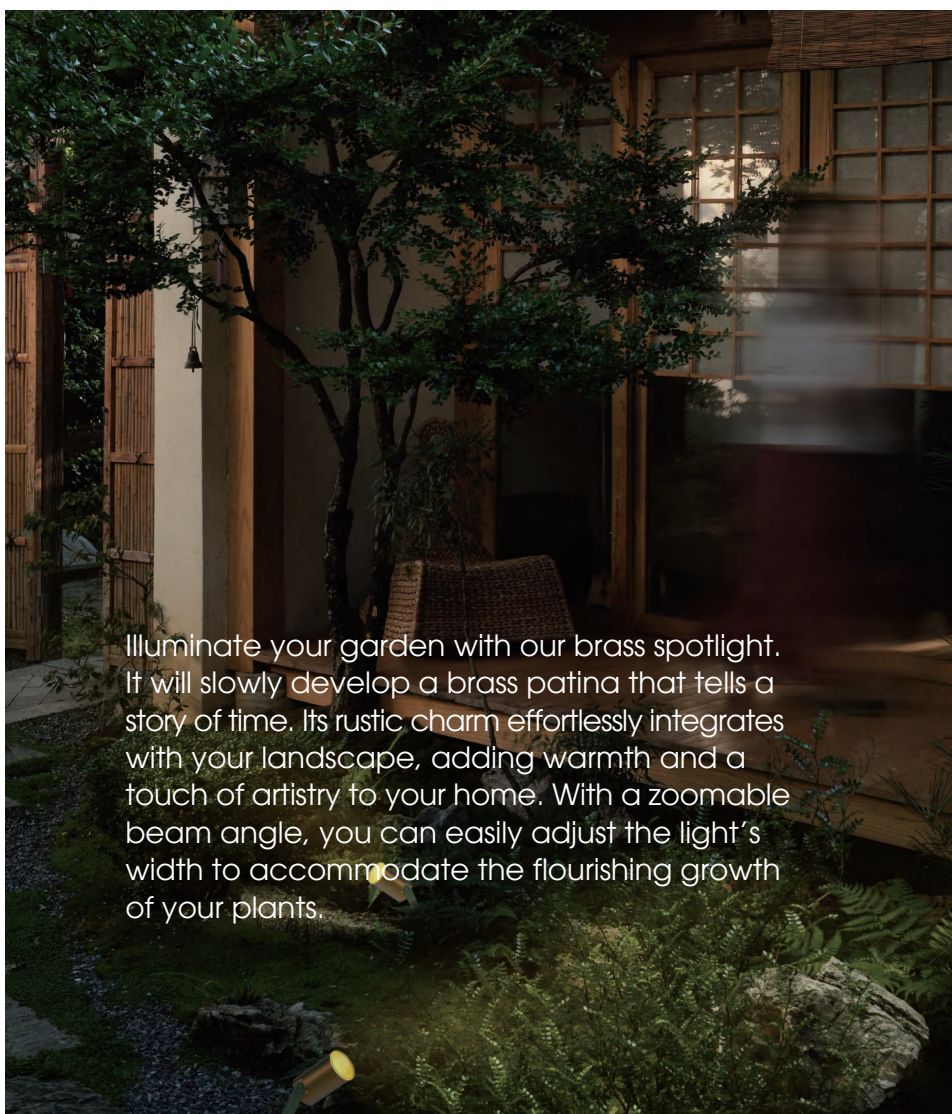

Illuminate your garden with our brass spotlight. It will slowly develop a brass patina that tells a story of time. Its rustic charm effortlessly integrates with your landscape, adding warmth and a touch of artistry to your home. With a zoomable beam angle, you can easily adjust the light's width to accommodate the flourishing growth of your plants.



W system	lm system	optics	code
6W	388-385	15°- 50°	SFO5006W-27N1550