




FOCUS

Φ32 Outdoor Uplights

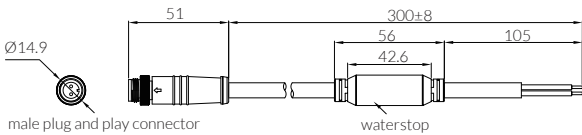

Fixed Optic

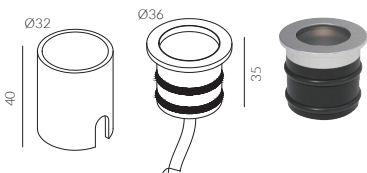


Accessories not included



Link Cable 1m

IP Rating:	IP67
Optics:	20°
UGR:	<19
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Voltage:	DC 24V
Power(W):	2.5W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male




2.5W Ra92 2700K 20°

h(m)	E(lx)	D(m)
0.5	1155	0.20
1.0	289	0.41
1.5	128	0.61
2.0	72	0.81
2.5	46	1.02
3.0	32	1.22



DuraGreen project:
Home in London



W system	lm system	optics	code
2.5W	94	20°	UL322.5W-27N20