

FOCUS



Φ70 Outdoor Uplights




cutout :70mm



Fixed Optic



honeycomb as default

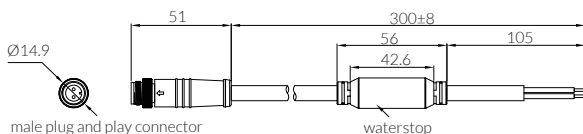


Accessories not included



Link Cable 1m

IP Rating:	IP67
Optics:	36°
UGR:	<19
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Voltage:	DC 24V
Power(W):	8W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male



8W Ra92 2700K 36°

h(m)	E(lx)	D(m)
0.5	2746	0.38
1.0	686	0.76
1.5	305	1.14
2.0	172	1.52
2.5	110	1.90
3.0	76	2.28



DuraGreen project:
Curio Hotel by Hilton, La Festa



W system	lm system	optics	code
8W	603	36°	UL7008W-27N36