

ACME OVAL

Φ57 Engine Oval


Trimless Adjustable Round Downlight



cutout:57mm




Adjustable Optic



baffle




IP Rating:	IP20 and IP44 options
Optics:	15°/24°/36°
UGR:	< 10
CRI:	98Ra
Lifetime:	> 50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W
Ambient temp:	-20 °C to 45 °C
Class:	II
Optional accessories:	Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter
Material:	Fine aluminium 6063A
Fire resistance test:	60 minutes




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	10728	0.15
1.0	2682	0.31
1.5	1192	0.46
2.0	671	0.61
2.5	429	0.77
3.0	298	0.92





10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	7580	0.21
1.0	1895	0.42
1.5	842	0.63
2.0	474	0.84
2.5	303	1.04
3.0	211	1.25




10W Ra98 3000K 36°


h(m)	E(lx)	D(m)
0.5	4206	0.28
1.0	1051	0.57
1.5	467	0.85
2.0	263	1.14
2.5	168	1.42
3.0	117	1.71

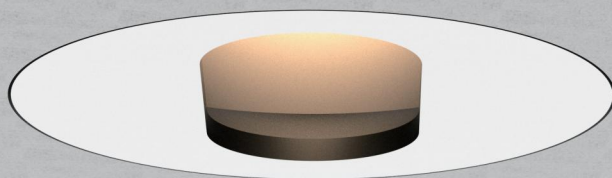

W system	lm system	optics	code
6W	367	15°	AFL5706W-O-TL-30N15-B
6W	349	24°	AFL5706W-O-TL-30N24-B
6W	340	36°	AFL5706W-O-TL-30N36-B



W system	lm system	optics	code
8W	419	15°	AFL5708W-O-TL-30N15-B
8W	470	24°	AFL5708W-O-TL-30N24-B
8W	456	36°	AFL5708W-O-TL-30N36-B



W system	lm system	optics	code
10W	462	15°	AFL5710W-O-TL-30N15-B
10W	628	24°	AFL5710W-O-TL-30N24-B
10W	616	36°	AFL5710W-O-TL-30N36-B