


BELLA

Φ50 Outdoor Projector Zoomable 15°-50°




Adjustable Optic




Structure Finish




Solid Brass

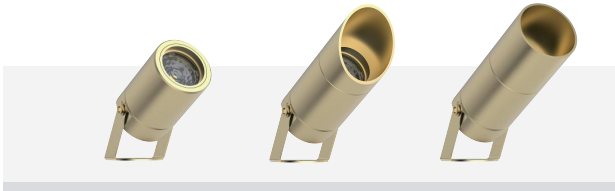


Accessories not included



Snoot Tube




Snoot 55°




Ground Stake

IP Rating:	IP65
Optics:	Zoomable 20°-50°
UGR:	<19
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Voltage:	DC 24V
Power(W):	6W
Ambient temp:	-20 °C to 45 °C
Class:	III
Plug Type:	Plug & Play (2 pin) - male
Material:	Brass + Stainless Steel



6W Ra92 2700K 20°

h(m)	E(lx)	D(m)
0.5	3056	0.21
1.0	764	0.41
1.5	340	0.62
2.0	191	0.83
2.5	122	1.04
3.0	85	1.24




6W Ra92 2700K 50°

h(m)	E(lx)	D(m)
0.5	948	0.44
1.0	237	0.87
1.5	105	1.31
2.0	59	1.75
2.5	38	2.18
3.0	26	2.62



Illuminate your garden with our brass spotlight. It will slowly develop a brass patina that tells a story of time. Its rustic charm effortlessly integrates with your landscape, adding warmth and a touch of artistry to your home. With a zoomable beam angle, you can easily adjust the light's width to accommodate the flourishing growth of your plants.



W system	lm system	optics	code
6W	445-436	20°- 50°	SFO5006W-27N2050